

Photometrics Pro

Luminaire Photometric Report

Specialized Lighting Solutions, LLC

Filename: LA-60004-AS-W30

Manufacturer: LIGMAN

Luminaire: Lighttalk 1 inground luminaire LED

Luminaire Cat: LA-60004-AS-W30

Lamp: 2x18 LED 3000K 0.4269,0.3964 3117K Ra84

Lamp Output: Total luminaire Lumens: 2190.5

Max Candela: 10,020.0 at Horizontal: 0°, Vertical: 160°

Input Wattage: 55.6

Luminous Opening: Rectangle (L: 1.18", W: 47.24")

Test: LIGMAN


Test Lab: Ligman Lighting Photometric Laboratory

Photometry : Type C

CIE Class: Indirect

Cutoff Class: Noncutoff

Nema Type: 5 X 4

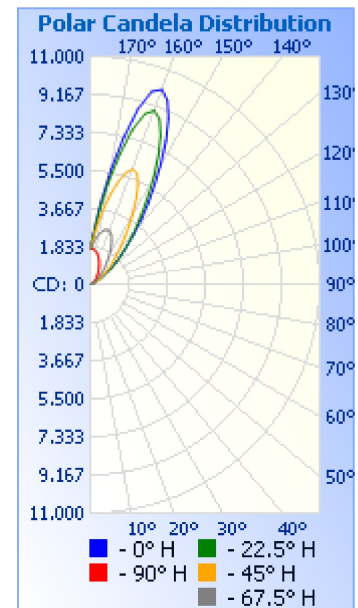


Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	0	0%
0-40	0	0%
0-60	0	0%
60-90	0	0%
70-100	6.4	0.1%
90-120	175.9	4%
0-90	0	0%
90-180	4,381.0	100%
0-180	4,381.0	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	0	0.0%	90-100	6.4	0.1%
10-20	0	0.0%	100-110	39.8	0.9%
20-30	0	0.0%	110-120	129.6	3%
30-40	0	0.0%	120-130	317.0	7.2%
40-50	0	0.0%	130-140	610.1	13.9%
50-60	0	0.0%	140-150	988.1	22.6%
60-70	0	0.0%	150-160	1,258.1	28.7%
70-80	0	0.0%	160-170	833.1	19%
80-90	0	0.0%	170-180	198.7	4.5%

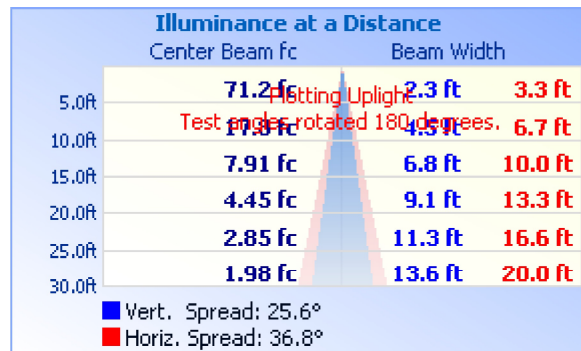

Luminaire Report Summary

IESNA:LM-63-2002
[TEST] LIGMAN
[TESTLAB] Ligman Lighting Photometric Laboratory
[ISSUEDATE] 05/10/2015 11:29:25
[MANUFAC] LIGMAN
[LUMCAT] LA-60004-AS-W30
[LUMINAIRE] Lightalk 1 inground luminaire LED
[LAMP] 2x18 LED 3000K
[_ABSOLUTELUMENS] 4383
[MORE] 0.4269,0.3964 3117K Ra84
[_EEC] A+

FILE: CREATED USING ABSOLUTE PHOTOMETRY
FILE: CANDELA MULTIPLIER: 1
FILE: VERTICAL ANGLES: 37, HORIZONTAL ANGLES: 73
FILE: COORDINATE SYSTEM: TYPE C
FILE: UNIT OF MEASURE: METRIC
FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.29 copyright 2003-2016 by jSolutions, Inc.
Reported data calculated from manufacturer's data file, based on IES recommended methods.